

INSTALLATION INSTRUCTION FOR FIXTURE 6722-355



WARNING! SHUT OFF THE POWER AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE

1. Shut off the power supply at the fuse box or circuit breaker box. Remove the old fixture from ceiling, including the old cross bar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Align the square caps (J) with the screw at both end of the fixture body, Secure it by tighter the finial (I).
4. Thread 2 mounting screws (C) through the mounting screw holes from the back of the Universal Mounting Plate (A). (The Side Without "GND" mark).
5. Attach Universal Mounting Plate (A) to the Outlet box using 2 Box Screws (B). The side of the Universal Mounting Plate (A) marked "GDN" must face out.
6. Follow the wiring instructions carefully (See Fig.2).
7. Attach the fixture main body (D) onto the outlet box by protruding 2 mounting screws through the mounting screw holes (E) on the fixture back plate, then secure the fixture on the wall by tighten 2 ball nuts (F).
8. Put the glass shade (G) over the socket cap and. And tighten the Glass shade by threading the socket ring (H) onto the socket.
9. Install the light bulb in accordance with fixture's specifications. **DO NOT EXCEED THE MAXMUM WATTAGE RATING!**

Wiring (See fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black (HOT) house wire. Connect the white wire from the fixture to the white (Neutral) house wire. Make sure all the wire nut was secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (Green or Bare Copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the cross bar.
2. Tuck the wire connections neatly into the ceiling junction box.

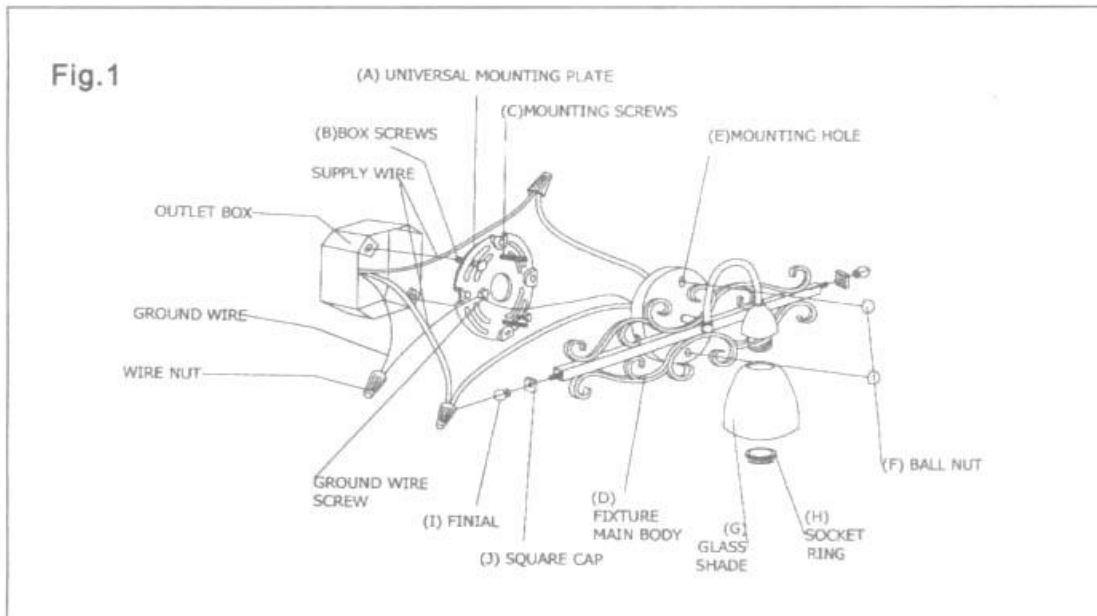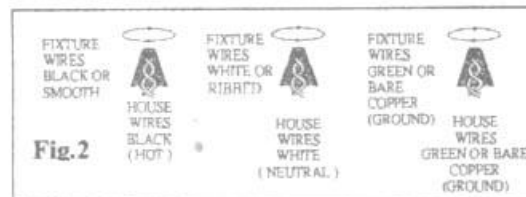

american
lighting
association