

INSTALLATION INSTRUCTIONS FOR 6741-206 6742-206 6743-206

For Wall Mount Fixture

©Minka Lighting, Inc.

This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE

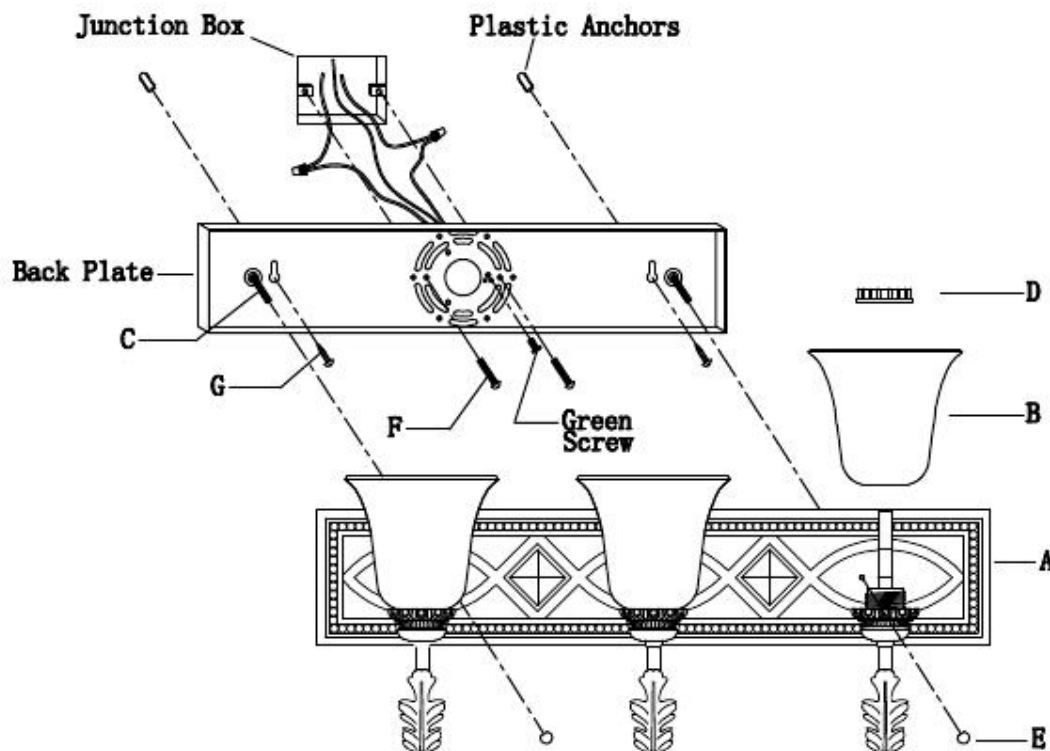
Installation (see fig.1)

1. Disconnect power at main electrical panel before installation.
2. Thread back plate studs (C) onto back plate, make sure back plate is plumb, mark location for plastic wall anchors.
3. Mount the back plate to the wall with the plastic anchors, the wood screws (G) and the two box screws (F). The side of the back plate marked "GND" must face out.
4. Guide fixture wires through hole in center of back plate.
5. Follow wiring instructions carefully (see fig.2)
6. Place the fixture body (A) over the back plate so the back plate studs protrude through the cover plate holes and screw cap nuts (E) onto the back plate studs (C).
7. Attach the glass shade (B) onto the socket of fixture body (A), and then lock it securely with the check ring (D).
8. Install the light bulbs (not included) in accordance with the fixture's specifications: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Wiring (see fig.2)




1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the circular strap.
2. Tuck the wire connections neatly into the wall junction box.

Fig.1



The figure is only for reference.

Fig.2

FIXTURE WIRES Black or Smooth		FIXTURE WIRES White or Ribbed		FIXTURE WIRES Bare Copper (Ground)	
HOUSE WIRES Black (Hot)		HOUSE WIRES White (Neutral)		HOUSE WIRES Green or Bare Copper (Ground)	

