

INSTALLATION INSTRUCTIONS

For Model 8617-A61

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. The circular strap (A) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your fixture back plate and thread the two studs (C) into the circular strap (A). (Fig.1)
4. Attach the circular strap (A) to the outlet box with outlet box screws (B). The side of the circular strap (A) marked "GND" must face out.

CONNECTING THE WIRES (Fig.2)

5. Connect the fixture wires to the junction box wires as shown in Fig.2 making sure all wire connectors are secured. If the junction box has a ground wire (green or bare copper) connect the fixture's ground wire to it, otherwise connect the fixture's ground wire directly to the circular strap with the green screw provided.

COMPLETING THE INSTALLATION

6. After wires are connected, tuck them carefully inside the outlet box.
7. Align the fixture back plate to studs (C) and secure ball nuts (D) (Fig1).
8. To prevent moisture from entering the outlet box and causing a short. Use clear caulking (i.e. Indoor/outdoor silicone sealant) to outline the outside of fixture back plate where it meets the wall leaving a space at bottom to allow moisture a means to escape (Fig3).
9. Install 3*60W B10.5 light bulbs (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
10. For installing bulbs or replacing bulbs at a later date, remove the bottom final (H), cap (G) and frame (F) from cover (E). After the installation, replace the frame (F), bottom cap (G) in sequence and secure with final (H). (Fig. 1)

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1

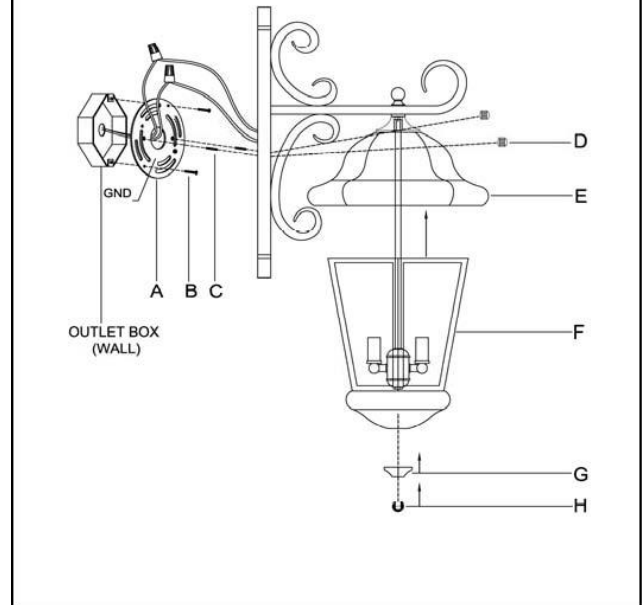


Fig. 2

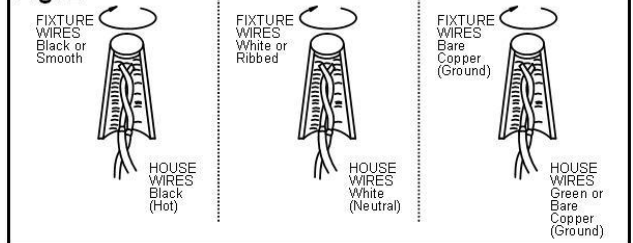


Fig.3

