

# INSTALLATION INSTRUCTIONS

Item#1352 (Rev. 06/09/2012)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### HANGING THE FIXTURE (Fig. 1)

1. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Shut off power at the circuit breaker and remove old fixture from ceiling, including the crossbar.
3. Thread Nipple (E) into Crossbar (C) so that the Nipple (E) protrudes through Crossbar (C) and thread Washer (B) and secure with Hex Nut (A) until tight.
4. Take Crossbar (C) assembly and mount to ceiling junction box using the junction box Screws (D). Tighten screws securely with screwdriver. The side of the Crossbar (C) with "GND" marked on it must face out.
5. Measure and determine the correct number of links needed for proper hanging height.
6. Use a pair of pliers to open one end link of the chain, attach the Chain (H) to the Fixture's Loop (J), and close the link.
7. Open the other end link of the chain and lift the fixture to attach to the Loop on Canopy, close the chain link.
8. Lace the fixture's wires through the chain links and pull until taut. Feed the fixture wires through the Canopy and Nipple and pull until taut.

### CONNECTING THE WIRES (Fig. 2)

9. At this point, connect the electrical wire as shown in figure 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the crossbar using the Green Screw provided.
10. Tuck these wire connections neatly into the ceiling junction box and raise the Canopy (F) all the way to the ceiling. The Nipple (E) should protrude through the Canopy (F) and secure with Decorative Nut (G).
11. Thread the Finial (L) onto Nipple (M).
12. Put Glass Shade (I) over socket as shown in Fig.1, and secure with Screw Shell (K).
13. Install Light bulbs (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the outlet box and test fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig. 1


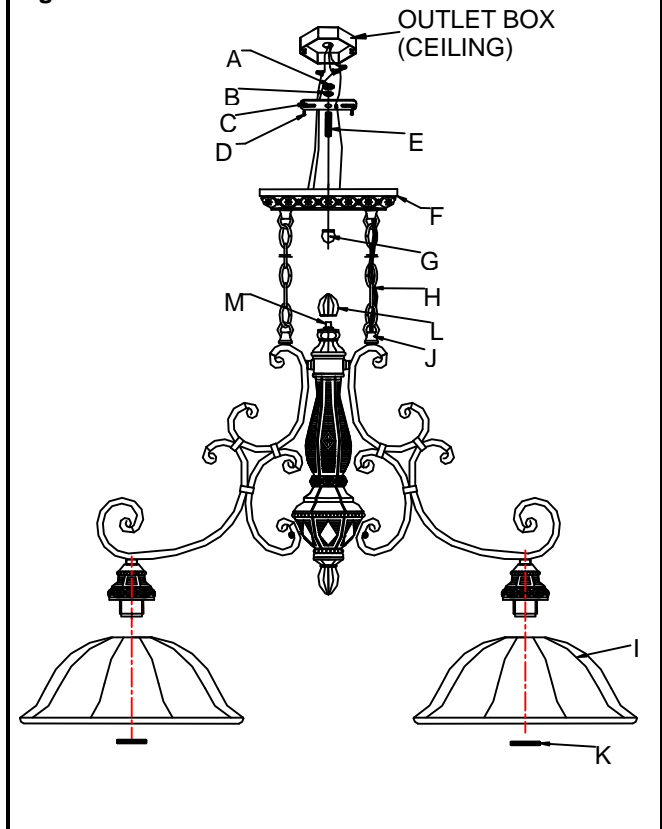


Fig. 2

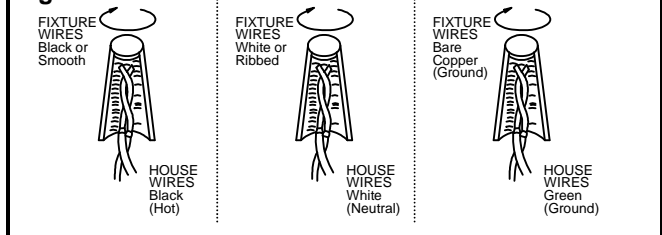

"U.S. Patent; D577,853

This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws."

© Minka Lighting, Inc.



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



LA-1500E