# **INSTALLATION INSTRUCTIONS**

## Item# 6357 (Rev. 05/10/2012) READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

### AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

#### ASSEMBLING THE FIXTURE (Fig. 1)

- 1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
- 2. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
- 3. Place Metal Tube (G), Check Ring (H), Plastic Washer (I) and Glass Shade (J) onto Nipple (O).
- 4. While holding the Glass Shade (J), slide bottom plastic washer (I), Metal Washer (K) over the Nipple (O) and tighten with Hex Nut (L). Then place the Bottom Cap (M) upwards to the bottom of Glass shade and secure with Final (N).
- 5. Install the light bulbs (not included) in accordance with the fixture's specifications. (DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

#### **MOUNTING THE FIXTURE (Fig. 1)**

- Thread Studs (D) about 1/4" into the pre-drilled holes of the Circular Strap (B) same distance apart as the holes in the canopy of Fixture Body (F).
- 7. Attach the Circular Strap (B) to the Outlet Box (A) using the two screws (C) from the outlet box. The side of the Circular strap marked "GND" should face out.

#### **CONNECTING THE WIRES (Fig. 2)**


8. While holding the Fixture Body (E) towards the ceiling, connect the electrical wire as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the circular strap using the Green Screw provided. After wires are connect, tuck them carefully into the ceiling Junction Box.


#### FINISHING THE INTALLATION (Fig. 1)

- 9. Finish hanging the fixture by placing Canopy of Fixture Body (F) over both Studs (D) and secure Fixture Body against ceiling with Knurled Knobs (E).
  - Your installation is now complete. Return power to the junction box and test the fixture.

<u>Note:</u> Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

"U.S. Patent; D577,853 This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws." © Minka Lighting, Inc.

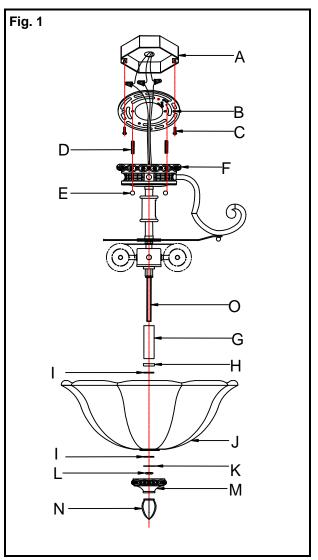





## LA-1409E